

YOUR SOIL - OUR PASSION

DALBO®

CULTIMAX ECO

800



MADE IN  DENMARK

CULTIMAX ECO

800



WORKING WIDTH
8.00 M



TRANSPORT WIDTH
3.30 M



WORKING DEPTH
2-6 CM



HORSEPOWER >
175 HP



WEIGHT
6.300 KG



CULTIMAX ECO is a further development of the well-known CULTIMAX series, which DALBO has produced for over 15 years. The machine is a robust 8-row cultivator with high capacity, specially developed for organic soil cultivation.

WHY CHOOSE CULTIMAX ECO?

- » Robust 8-row construction with high working capacity
- » Effective mixing of soil and plant residues ensures a good seedbed
- » High throughput provides uniform cultivation
- » Swivel wheels on the side frames ensure stable operation
- » Adjustable drawbar provides precise and flexible adjustment
- » Effectively reduces weeds—including types with taproots
- » Goosefoot shares ensure full cutting of weeds



TECHNICAL DATA

	800 ECO T
Transport width	3.3 m
Weight kg	6.300
Wheels	520/50x17 14 PLY
Power requirement min.	175 HP
Hydr. connections	2xDA

TINES

CULTIMAX ECO 800 has a tine spacing of 150 mm and is fitted with a goosefoot of 210 mm. The large overlap ensures full cutting, and the specially made robust double-spring goosefoot

is excellent for handling weeds with taproots. The 54 tines are distributed across all 8 rows, ensuring a superior trash flow.



REAR HARROW

The robust rear harrow is equipped with 12 mm curved harrow tines, distributed across 3 rows. With all 3 rows, there is a very good opportunity for the soil to be shaken from the roots of weeds, leaving an even surface.

The rear harrow has adjustable weight transfer via strong tension springs from the main frame to the rear harrow.



WHEELS

CULTIMAX ECO 800 is standard equipped with large wheels in size 520/50x17.


This provides a very high load-bearing capacity, as the large wheel assembly ensures precise depth control via hydraclips – even in soft areas.



HYDRAULIC WEIGHT DISTRIBUTION & DUOFLEX

CULTIMAX ECO 800 is equipped with DALBO's well-known and thoroughly tested hydraulic weight distribution, ensuring uniform weight across the entire working width.

At the same time, the machine also features DUOFLEX. A system that ensures individual mobility for each section, thus optimal soil contact regardless of the soil's contours.

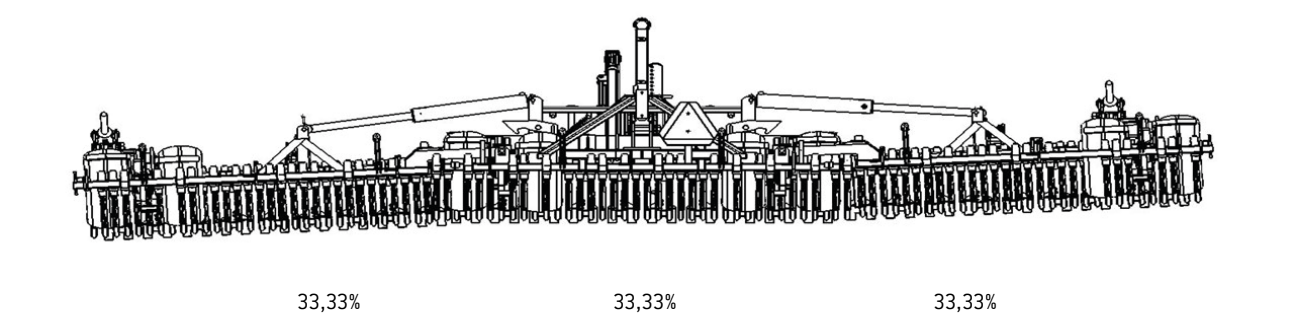

EQUIPMENT

	800 ECO T
Hydraulic weight distribution	■
DUOFLEX system	■
8-row cultivator with 210 mm goosefoot tines	■
3-row rear harrow with 12 mm harrow tines	■
Wheels 520/50x17	■
Front support wheels: 200/60x14.5 10 PLY	■

■ Standard □ Option - Not possible

DALBO®

Also available from DALBO



POWERROLL 3-sec 450-950



POWERROLL 5-sec 1030-1830



FRONT PRESSES 150-600



MAXIROLL 530-1230



MAXIROLL GREENLINE 630-830



MAXICUT 600-920



CULTIMAX 550-1000



ROLLOMAXIMUM 620-1240



ROLLOMASTER 300-600



TRIMAX 300-630



POWERCHAIN 500-1200



SUBSOILER M Profi

DALBO A/S, Bindeballevej 69, DK-7183 Randbøl,
Tel.: +45 75 88 35 00, info@dalboagro.com, www.dalboagro.com